


Tank Truck Overfill Prevention System

**Plug & Play
Connector**
**Simple, error
free installation**
**Waterproof
wiring IP66/IP67**

FEATURES

- Pre-gantry system check, simply by pushing a button
- No power connection necessary – accu will be charged while truck is loading at the gantry
- Only one overfill sensor needed for loading from gantry and selfloading from truck/trailer
- Seamless integration with PreciCONTROL
- Integrated pressure switch
- 3 or 4 slot design




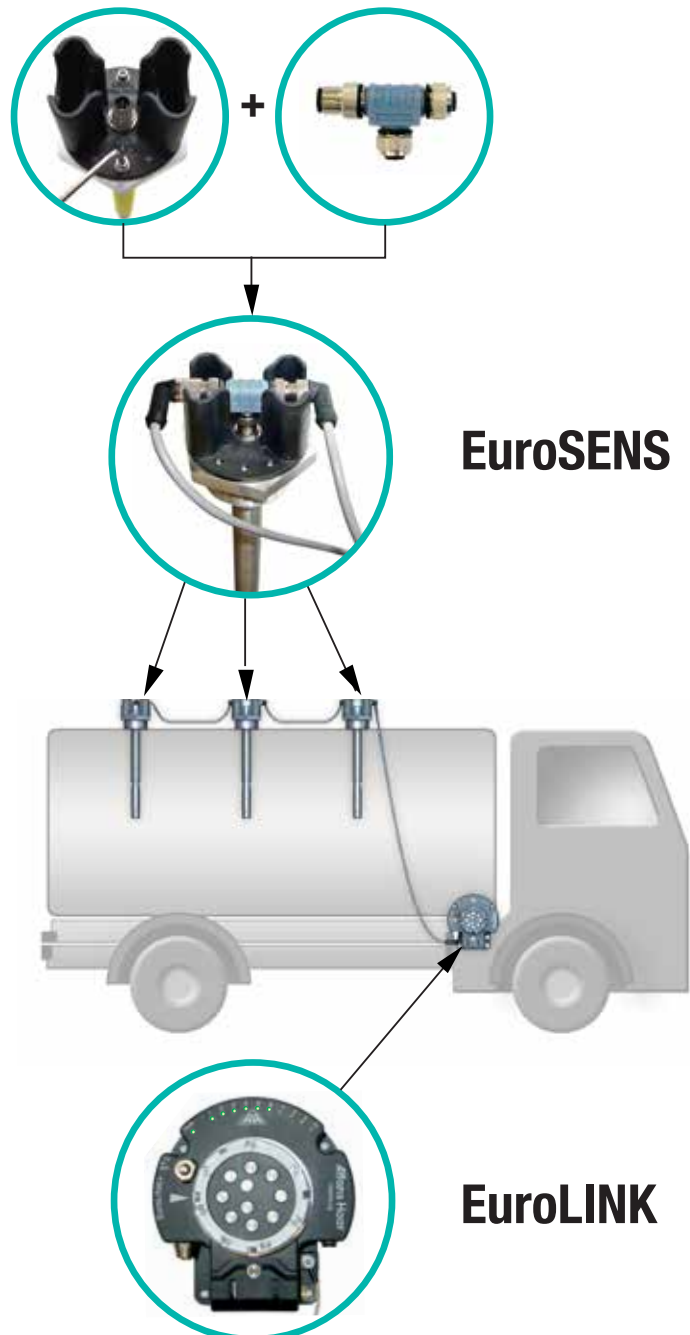


EuroSENS - EuroLINK

OVERFILL PREVENTION SYSTEM



EuroSENS Installation examples / Dimensions

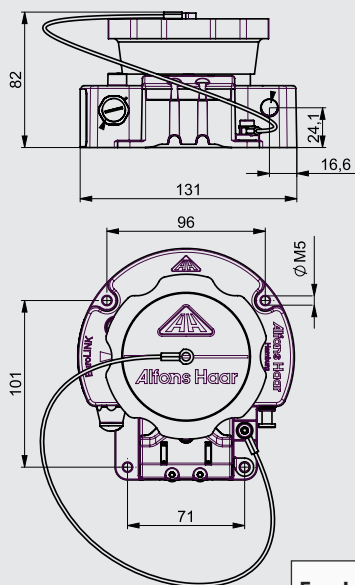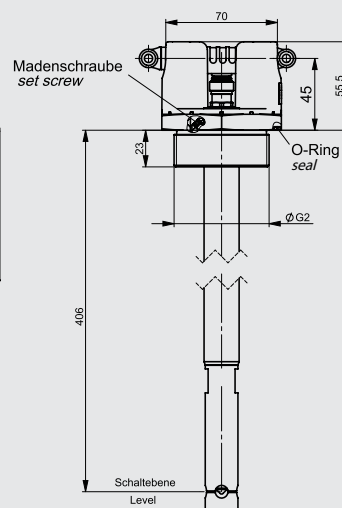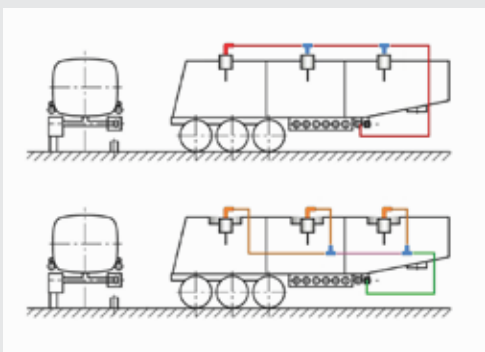


EuroLINK

10-pin Socket for
Overfill Protection
According to EN13922
with integrated
interlock switch for
vapour recovery
supervision.

FRONT: EUROLINK C+



FRONT: EUROLINK PC+

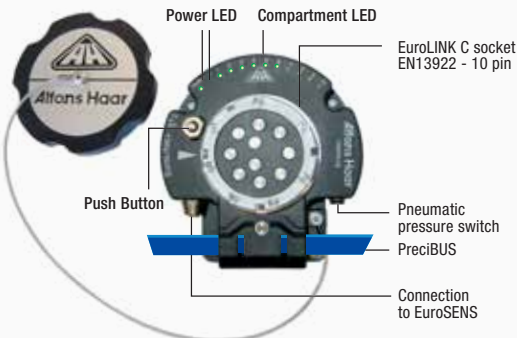

EuroLINK VERSION	EuroLINK C	EuroLINK C+	EuroLINK PC+
	EuroLINK C 3S	EuroLINK C+ 3S	EuroLINK PC+ 3S
EuroLINK FEATURES			
Basic function according to EN 13922 5-wire system	✓	✓	✓
Test of the sensor states without using the gantry-controller	—	✓	✓
Connectivity to the Alfons Haar PreciCONTROL-System	—	—	✓
Monitoring of the overfill sensors according to EN 13922 for self-loading without the pilot system of the gantry	—	—	✓
Diode for additional recognition of grounding (PIN 9 – E2) can be activated for applications outside EN 13922	✓	✓	✓
For plugs (3 slot) outside DIN EN 13922	only version 3S	only version 3S	only version 3S